

TRATAUTO®

CATALOG

CARS - 4X4 - FLEET - MOTORBIKES - AGRICULTURAL



FEEL THE POWER WITH TRATAUTO

COOLING SYSTEM - ENGINE TREATMENT - SPECIAL LUBRICANTS
FUEL ADDITIVE - CLEANERS & OTHERS - AIR CONDITIONER

Radiator Stop Leak



Reference:
843654897522

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

Product formulated to seal leaks in the cooling system. It can remain inside the circuit with risk of obstruction.

WHAT DOES IT DO?

Seals cracks in radiators, cylinder heads and blocks while the product remains in the system.

WHEN SHOULD IT BE USED?

FOR:

- Efficiently sealing leaks in radiators made of copper, brass, aluminium and plastic
- Sealing leaks in heating radiators
- Reducing the consumption of anti-freeze lost by evaporation in engines that work at high temperatures
- Sealing critical points of the radiator, such as: plastic-metal joints, creases and vertices.

INSTRUCTIONS FOR USE

1. Check that the circuit is clean
 2. Shake the container until the components have mixed together perfectly
 3. With the engine at room temperature and without pressure, remove the cap of the cooling system's expansion tank/radiator
 4. Add the contents of the product and replace the cap on the expansion tank/radiator
 5. Start the engine and wait until it has heated to running temperature
 6. Check that the leak has been properly sealed.
- Must be performed by a professional expert

WARNING REGARDING USE

It is not necessary to replace the anti-freeze/coolant.

COMPATIBLE

Compatible with any type of anti-freeze/coolant.

546 Radiator Flush

737 Cooling System Degreaser

508 CER-MET Permanent Block & Radiator Seal

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:


Clean and service the whole cooling system:

- 1 year

Add the product as a preventive measure:

- Not Present

Radiator Flush

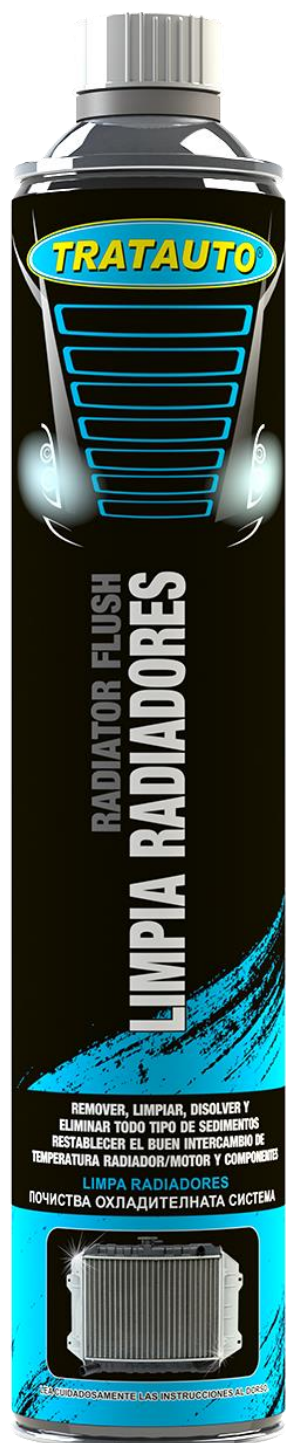

Reference:
843654897546

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

A highly concentrated product, formulated for cleaning all type of residues (except oil) incusted in the radiator and cooling system.

WHAT DOES IT DO?

State-of-the-art components that remove limescale, stir and clean dirt in all types of radiators and elements that make up a cooling system.

WHEN SHOULD IT BE USED?

FOR:

- Stirring, cleaning, dissolving and eliminating all kinds of sediment
- Re-establishing the proper temperature exchange between the radiator/engine and components.

INSTRUCTIONS FOR USE

1. With the engine at room temperature and without pressure, remove the cap of the cooling system's expansion tank/radiator
 2. Add the contents of the product
 3. Replace the cap on the expansion tank/radiator
 4. Start the engine and wait until it has heated to running temperature
 5. Leave the engine idle for 30 minutes
 6. Switch off the engine and wait until the temperature and pressure in the circuit have reduced
 7. Empty the circuit and rinse with abundant water until the last residues have been eliminated
 8. Fill the circuit with anti-freeze /coolant with the proportions recommended by the manufacturer
 9. Replace the cap on the expansion tank/radiator.
- Must be performed by a professional expert

WARNING REGARDING USE

Because it does not contain abrasive elements, it can be used in any type of engine without any risk of damage.

COMPATIBLE

Compatible with any type of anti-freeze/coolant.

515 Radiator Stop Leak

737 Cooling System Degreaser

508 CER-MET Permanent Block & Radiator Seal

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole cooling system:

- 1 year

Add the product as a preventive measure:

- 2000 hours



Reference:
843654897737

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

Formulated for cleaning and eliminating remains of oil and grease from the whole cooling system.

WHAT DOES IT DO?

Its main purpose is to eliminate the oil emulsion in water, in order to efficiently extract residues of oil.

WHEN SHOULD IT BE USED? - FOR:

- Eliminating all traces of oil from the cooling system after a breakage in the cooler or cylinder head gasket
- For stirring and cleaning sediment from the cooling system
- Re-establishing the proper temperature exchange between the radiator/engine and components
- Suitable for use in radiator cleaning machines.

INSTRUCTIONS FOR USE

1. If there is a very high concentration of oil, previously evacuate the circuit and rinse with water.
2. With the engine at room temperature and without pressure, remove the cap of the cooling system's expansion tank/radiator
3. Add the contents of the product
4. Replace the cap on the expansion tank/radiator
5. Start the engine and wait until it has heated to running temperature
6. Leave the engine idle for 30 minutes and check that the temperature does not exceed the normal range of performance
7. Switch off the engine and wait until the temperature and pressure in the circuit have reduced
8. Empty the circuit and rinse with abundant water until the last residues have been eliminated
9. Fill the circuit with anti-freeze /coolant with the proportions given by the manufacturer
10. Replace the cap on the expansion tank/radiator.
 - Must be performed by a professional expert

WARNING REGARDING USE

Because it does not contain abrasive elements, it can be used in any type of engine without any risk of damage

In very contaminated circuits, repeat the process.

COMPATIBLE

Compatible with any type of anti-freeze/coolant.

515 Radiator Stop Leak

546 Radiator Flush

508 CER-MET Permanent Block & Radiator Seal

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole cooling system:

- 1 year

Add the product as a preventive measure:

- Not Present

CER-MET Permanent Block & Radiator Seal



Reference:
843654897508

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

Improved formula with a ceramic-metal base for permanently sealing leaks in the cooling system.

WHAT DOES IT DO?

Seals any crack (2 mm) by means of temperature and pressure. Suitable for radiators, cylinder head and block.

WHEN SHOULD IT BE USED?

FOR:

- PERMANENTLY sealing leaks in radiators made of copper, brass, aluminium and plastic
- Sealing microcracks in cylinder heads made of cast iron, steel and aluminium
- Sealing leaks in heating radiators
- Reducing the consumption of anti-freeze lost by evaporation in engines that work at high temperatures
- Sealing critical points of the radiator, such as: plastic-metal joints, creases and vertices.

INSTRUCTIONS FOR USE

1. It is **IMPORTANT** to shake the container until the components have mixed together perfectly
2. With the engine at room temperature and without pressure, remove the cap of the cooling system's expansion tank/radiator
3. Add the contents of the product and replace the cap on the expansion tank/radiator
4. Start the engine and wait until it has heated to running temperature
5. Check the leak has been sealed properly.
6. Must be performed by a professional expert

WARNING REGARDING USE

Make sure the circuit is clean.

COMPATIBLE

Compatible with any type of anti-freeze/coolant.

515 Radiator Stop Leak

546 Radiator Flush

737 Cooling System Degreaser

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole cooling system:

- 1 year

Add the product as a preventive measure:

- Not Present
- Use only in clean circuits

MT2000 Synthetic Metal Treatment



Reference:
843654897560

Capacity:
900 ml.

Units in Box:
6

DESCRIPTION

100% synthetic, cutting-edge treatment that has been especially formulated to reduce wear and friction on all types of metals and alloys.

WHAT DOES IT DO?

It creates a thin layer over the internal engine components, reducing friction and wear, thus improving performance and lowering consumption. It drastically reduces the mechanical force and friction on all the metallic parts of the engine. It does not alter the colour, density and volume of the oil.

WHEN SHOULD IT BE USED?

FOR:

- Reducing the friction and wear of the moving parts of the engine
- Reducing the temperature of the engine when it is running
- Silencing the internal engine noises
- Protecting the engine and components from rust
- Improving and prolonging the life of the oil
- Essential in turbo changes/repairs
- Engines that were not serviced after the recommended number of kilometres or length of time.
- It does not affect the correct performance of catalytic converters or particulate filters.

INSTRUCTIONS FOR USE

1. With the engine switched off, remove the oil filler cap
2. Add the contents of the product
3. Replace the engine oil filler cap.

WARNING REGARDING USE

Apply preferably when changing the oil.

COMPATIBLE

Compatible with all engines and oils.
560 MT2000 Synthetic Metal Treatment
561 Oil Stop Leak
090 Smoke Eliminator
430 Motor Flush

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole lubrication system:

- 1 year

Add the product as a preventive measure:

- 4000 hours

Oil and Fuel Stop Leak



Reference:
843654897561

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

Formulated to repair oil leaks in all types of engines

WHAT DOES IT DO?

Restores the elasticity and original size of joints and oil seals, thus detaining oil leaks.

It does not change the colour, density and volume of the oil.

WHEN SHOULD IT BE USED? FOR:

- Detaining oil leaks from the rockerbox gasket, crankcase and oil seals
- Preventing leaks and conserving the flexibility of gaskets and oil seals
- For extra protection, combine with MT2000 Metal Treatment.
- It does not affect the correct performance of catalytic converters or particulate filters.
- **Diesel:** Proven efficiency to seal diesel fuel leaks in injection pumps of all types, mechanical and electronic.

INSTRUCTIONS FOR USE

1. With the engine switched off, remove the oil filler cap
 2. Add the contents of the product
 3. Replace the engine oil filler cap.
- Diesel fuel: We recommend adding all the contents (300 ml) in a full tank (40/50 liters)

WARNING REGARDING USE

Acts progressively, which means effective results are obtained after 500 km

Does not act on hardened/crystallised gaskets and oil seals

Apply preferably when changing the oil.

COMPATIBLE

Compatible with all engines and oils.

560 MT2000 Synthetic Metal Treatment

090 Smoke Eliminator

430 Motor Flush

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole lubrication system:

- 1 year

Add the product as a preventive measure:

- 4000 hours
- For extra protection, combine with **MT2000 Synthetic Metal Treatment**.

Smoke Eliminator



Reference:
843654897090

Capacity:
900 ml.

Units in Box:
6

DESCRIPTION

A synthetic-based treatment formulated to reduce smoke emissions (bluey-white) and lower oil consumption.

WHAT DOES IT DO?

It forms a viscous layer filling all the spaces between worn components or with excessive tolerance, such as cylinder liners and pistons. It does not alter the colour, density and volume of the oil.

WHEN SHOULD IT BE USED?

FOR:

- Reducing the smoke emissions caused by excessive oil combustion
- Repaired engines or which consume a great deal of oil
- Preventing the saturation of the particulate filter in engines that consume oil
- Increasing the engine compression ratio
- Reducing internal engine noises
- Vehicles with problems regarding the Vehicle Inspection Test caused by these cases.
- It does not affect the correct performance of catalytic converters or particulate filters.

INSTRUCTIONS FOR USE

1. With the engine switched off, remove the oil filler cap
2. Apply the contents of the product after changing the oil
3. Replace the engine oil filler cap.

WARNING REGARDING USE

Apply preferably when changing the oil.

COMPATIBLE

Compatible with all engines and oils.
560 MT2000 Synthetic Metal Treatment
561 Oil Stop Leak
430 Motor Flush

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole lubrication system:

- 1 year

Add the product as a preventive measure:

- 4000 hours

- **For extra protection, combine with MT2000 Synthetic Metal Treatment.**

Motor Flush



DESCRIPTION

Treatment formulated for eliminating varnishes, sludge and solid remains from all the internal engine parts.

WHAT DOES IT DO?

It contains special additives that treat, dissolve and clean varnishes, deposits and residues in only 5 minutes.

Does not damage gaskets or oil seals.

WHEN SHOULD IT BE USED?

FOR:

- Eliminating and cleaning all type of residues and sediment from combustion
- Increasing the air-tightness of cylinders
- Restoring compression losses
- Cleaning carbonised segments
- Engines with high mileage
- Engines that were not serviced when they reached the recommended mileage or time

INSTRUCTIONS FOR USE

1. Start the engine and wait until it reaches running temperature
2. Switch off the engine and remove the oil filler cap
3. Add the contents of the product
4. Replace the oil filler cap
5. Switch on the engine and leave it idle for a **MAXIMUM OF 5 MINUTES**
6. Switch off the engine and extract the oil through the lower crankcase.
7. Must be performed by a professional expert

WARNING REGARDING USE

For turbo engines that need a replacement due to breakage we recommend you carry out the cleaning process twice.

COMPATIBLE

Compatible with all engines and oils.

560 MT2000 Synthetic Metal Treatment

561 Oil Stop Leak

090 Smoke Eliminator

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole lubrication system:

- 1 year

Add the product as a preventive measure:

- 4000 hours


- For extra protection, combine with **MT2000 Synthetic Metal Treatment**.

Reference:
843654897430

Capacity:
900 ml.

Units in Box:
12

Transfer Case Treatment

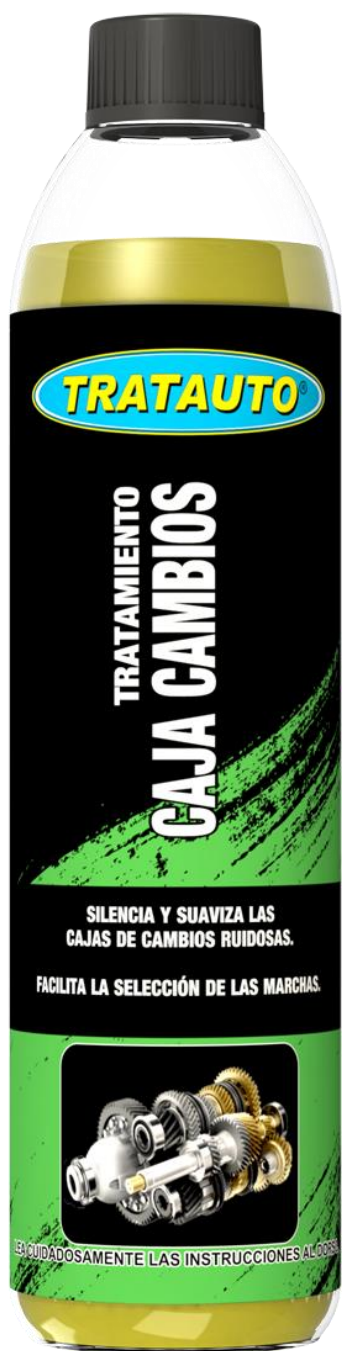

Reference:
843654897134

Capacity:
236 ml.

Units in Box:
12

DESCRIPTION

100% synthetic, cutting-edge treatment for manual, automatic, generator and differential gearboxes.

WHAT DOES IT DO?

It creates a resistant layer to reduce the friction between the gears (helical and flat) without leaving any type of solid residue.

It does not alter the colour, density and volume of the oil.

WHEN SHOULD IT BE USED?

FOR:

- Optimising performance between the internal elements in manual, automatic, generator, speed reducer and differential gearboxes
- Reducing noises and vibrations caused by wear
- Making it easier to select the gears, especially in worn synchronisers
- Re-establishing the correct performance of valves and other components in automatic gearboxes
- Repairing minor oil leaks.

INSTRUCTIONS FOR USE

1. With the engine switched off, remove the gearbox oil filler cap
2. Apply the contents of the product
3. Replace the cap
4. If it applied to generators and differentials follow the same procedure.
 - Must be performed by a professional expert
 - Requires dismantlement

WARNING REGARDING USE

During the treatment it is normal if the vehicle starts:
Jerking / Automatic Gearboxes

COMPATIBLE

Compatible with all engine oils - ATF / Dexrom / Mercon / Mineral / Synthetic

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole gearbox:

- 1 year

Add the product as a preventive measure:

- 4000 hours

Power Steering Conditioner



Reference:
843654897562

Capacity:
236 ml.

Units in Box:
12

DESCRIPTION

Treatment for repairing and improving the steering system.

WHAT DOES IT DO?

Eliminates minor leaks, revitalises components, reduces noise, wear and temperature.

WHEN SHOULD IT BE USED?

FOR:

1. Stopping minor leaks, thanks to its revitalising action on oil seals
2. Reducing noises, vibrations, temperature and re-establishing the correct performance of hydraulic steering
3. Reducing friction between metallic parts
4. Reducing excessive play in the steering gear
5. Reducing noise from the power steering pump noise
6. Lengthens the useful life of all the components

INSTRUCTIONS FOR USE

1. With the engine switched off, remove the power steering reservoir cap
 2. Add the contents of the product
 3. Replace the filler cap
- Must be performed by a professional expert

COMPATIBLE

Compatible with the following hydraulic steering fluids - ATF / Dexrom / Mercom / LHM / LDS

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole steering system:

- 1 year

Add the product as a preventive measure:

- 4000 hours

White Lithium Grease



DESCRIPTION

Lithium-based multi-use protector-lubricant aerosol.

WHAT DOES IT DO?

Lubricates any movable piece guaranteeing dimensional stability and durability at different temperatures.

Penetrates and protects from rust caused by humidity, saltpetre and condensation from any liquid element.

WHEN SHOULD IT BE USED?

FOR:

- Lubricating electric windows, starting motors, alternators and connectors exposed to the exterior
- Isolating from humidity working within a wide range of temperature
- Providing a high level of stability to external electric systems
- Protecting the rim-hub assembly every time the tyres are changed.

INSTRUCTIONS FOR USE

1. Apply an even layer on all the components that require lubrication or protection.

WARNING REGARDING USE

When applying to the hub and rim, take care not to spray onto brake discs or pads. During the treatment it is normal if the following are noticed:

- Characteristic smells
- Leaves a stain

COMPATIBLE

422 All in 1 – Super MultiUse

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Carry out a complete service of the components::

- 1 year

Add the product as a preventive measure:

- 1 year

Reference:
843654897409

Capacity:
300 ml.

Units in Box:
15

Cooper Grease



DESCRIPTION

Special formula, high temperature resistant adhesive copper paste and pressures to lubricate, disassemble and protect against corrosion.

WHAT DOES IT DO?

High temperature anti-seize lubricant.
Soft copper color grease.

WHEN SHOULD IT BE USED? FOR:

- Resistant high temperatures up to 1100 ° C.
- Pressure settings, exhaust couplings, wheel bolts ... Nuts, bolts, bolts.
- Reduce noise in the brake disc. Contact grease for batteries.

INSTRUCTIONS FOR USE

1. Apply on a clean, dry surface.
2. Apply a thin and even layer.
3. Do not mix with other products.

WARNINGS OF USE

We recommend NOT to use on connected equipment. We recommend using our product with adequate ventilation.

COMPATIBLE

422 All in 1 - Super MultiUse

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:


Apply on a clean Surface

Reference:
843654897412

Capacity:
300 ml.

Units in Box:
15

Anti-Drip Grease

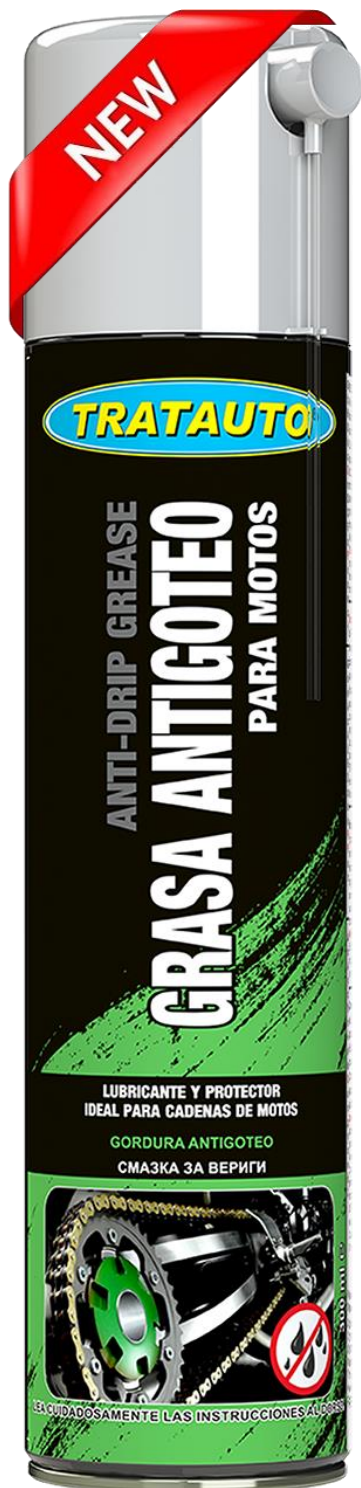

Reference:
843654897410

Capacity:
300 ml.

Units in Box:
15

DESCRIPTION

State-of-the-art treatment formulated to lubricate and treat the motorcycle chain. Special formula ANTI-DRIP.

WHAT DOES IT DO?

Lubricates and protects chains that withstand extreme conditions.

WHEN SHOULD IT BE USED? FOR:

- Reduce friction properties.
- Reduce wear.
- Resistant to water action.
- Lubricate and protect.
- Penetrates and adheres.
- ANTI-DRIP.

INSTRUCTIONS FOR USE

1. If necessary, use a cleaner to remove dirt, rust and grease.
2. Apply MOTORCYCLE GREASE on the inner side as you rotate so that the product is evenly distributed.
3. Wipe the wheel and tire with a cloth to remove debris.

WARNINGS OF USE

We recommend checking the chain every 300-500 km and before long journeys.

COMPATIBLE

422 All in 1 - Super MultiUse


RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Perform integral component maintenance:
Every 1000 km.

Preventively add:
500 Km.

Red Grease

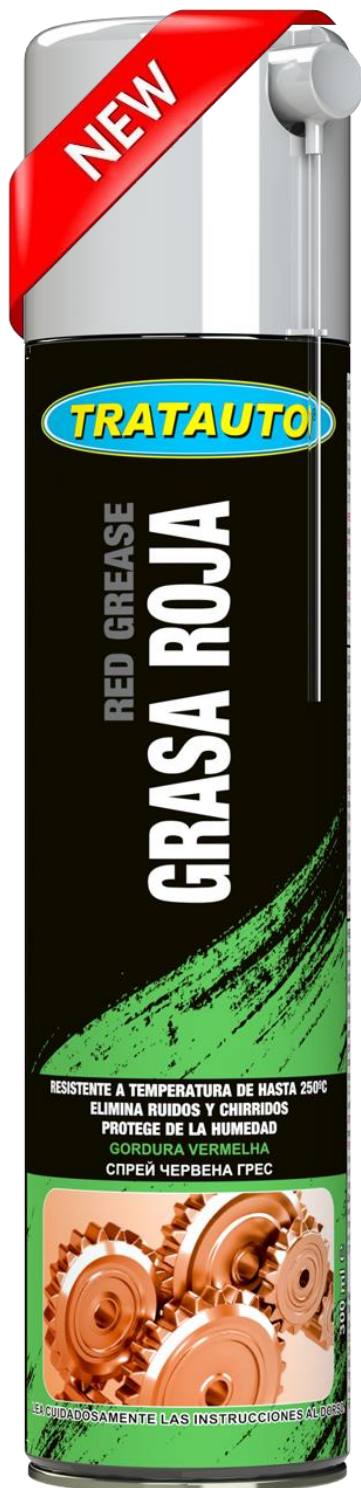

Reference:
843654897413

Capacity:
300 ml.

Units in Box:
15

DESCRIPTION

Latest generation aerosol Synthetic lubricant

WHAT DOES IT DO?

Formulated to lubricate any type of part. It supports high temperatures of up to 250°C, even at high temperatures the grease remains flexible without cracking or hardening.

WHEN SHOULD IT BE USED? FOR:

- Lubricate: chains, cables, guides, rollers, bearings ...
- Reduce the friction and wear on any metal or plastic surfaces.
- Isolate the humidity working in a wide range of temperature.
- Eliminate noise and squeaks.
- Protect against rust.

INSTRUCTIONS FOR USE

1. Apply a uniform coat on the components that require lubrication or protection.

WARNING REGARDING USE

When applying to the hub and rim, take care not to spray onto brake discs or pads

COMPATIBLE

422 All in 1 – Super MultiUse


RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our Technical Department recommends:

Carry out a complete service of the components:
1 year

Add the product as a preventive measure:
1 year

Particle Filter Cleaner

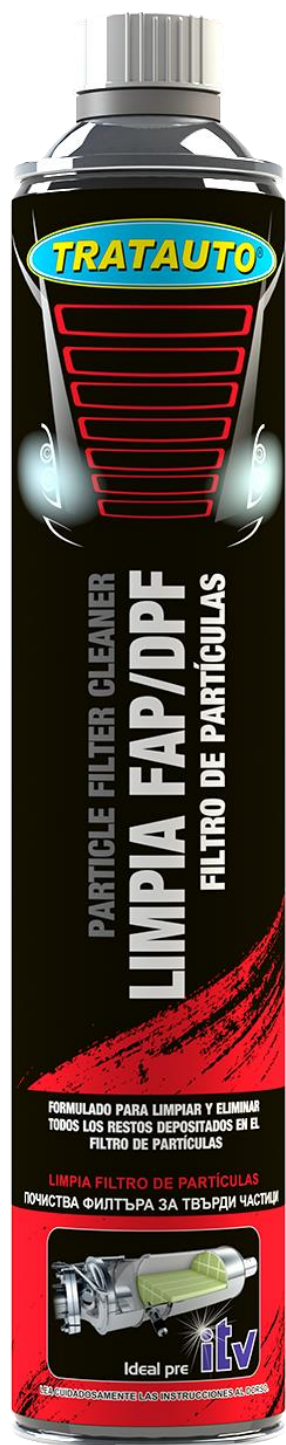

Reference:
843654897501

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

Cutting-edge product formulated for cleaning the particulate filter.

WHAT DOES IT DO?

Combined with the post-injection (regeneration) of the engine process, it raises and maintains the temperature of exhaust gases, descaling and incinerating impurities and residues from the filter that will then be expelled through the exhaust pipe.

WHEN SHOULD IT BE USED? - FOR:

- Eliminating all types of impurities and residues with a high level of saturation from the particulate filter
- Re-establishing a correct air/fuel relation
- Vehicles that are driven short distances in towns and cities
- Reducing the relation of polluting gases evaluated in the Vehicle Inspection Test.

INSTRUCTIONS FOR USE

1. Remove the fuel tank cap
 2. Empty the contents of the container into the tank with a low amount of fuel
 3. Replace the cap of the tank
 4. Start the engine and leave it idle for 5-8 minutes
 5. Drive for about 20 Km or more, keeping the revolutions between 2,500-3,000 r.p.m.
- Must be performed by a professional expert

WARNING REGARDING USE

To correctly assess the filter, diagnose the percentage of saturation before and after using the product. Effective in the following systems: Common rail, CDTI, CDI, CDTDI, TDCI, CRDI, HDI, JTD, GDI, DCAT, DTI, IDE...

During the treatment it is normal if the vehicle produces:

- Excessive smoke
- Characteristic smells
- Jerking
- An increase of r.p.m.

COMPATIBLE

479 Catalytic Converter Cleaner
478 Diesel Fuel Treatment
444 Intake Cleaner
427 DT1000 Injector & Glow Plugs Unblocker
428 Starting Fluid

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole fuel circuit:

- 1 year

Add the product as a preventive measure:

- 2000 hours

Catalytic Converter Cleaner



Reference:
843654897479

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

A cutting-edge product for cleaning inside the catalytic converter and other elements that make up the exhaust system.

WHAT DOES IT DO?

Cleans any type of accumulated residue and regenerates the chemical function in the catalytic converters of diesel and petrol engines, thus lengthening their useful life.

WHEN SHOULD IT BE USED?FOR:

- Re-establishing catalytic performance
- Dissolving residues typical of diesel and petrol in pumps, injectors and exhaust systems
- Re-establishing a correct air/fuel relation
- Eliminating residues in the exhaust system after a turbo breakage
- Cleaning variable geometry turbos which are blocked or with carbon deposit.

INSTRUCTIONS FOR USE

1. Remove the fuel tank cap
2. Empty the contents of the container into the tank with a low amount of fuel
3. Replace the cap of the tank
4. Start the engine and leave it idle for 5-8 minutes
5. Drive for about 20 Km or more, keeping the revolutions at a normal level.

WARNING REGARDING USE

During the treatment it is normal if the vehicle produces:

- Excessive smoke
- Characteristic smells
- Jerking
- An increase of r.p.m.

COMPATIBLE

- 501 Particle Filter Cleaner
- 478 DieselFuel Treatment
- 444 Intake Cleaner
- 427 DT1000 Injector & Glow Plugs Unblocker
- 428 Starting Fluid

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole fuel circuit:

- 1 year

Add the product as a preventive measure:

- 2000 hours

Diesel Fuel Treatment



Reference:
843654897478

Capacity:
900 ml.

Units in Box:
12

DESCRIPTION

Improved, cutting-edge formula for cleaning the fuel circuit.

WHAT DOES IT DO?

HyOx formula with a dissolvent and dispersant action that eliminates and cleans residues in nozzles, pumps and any other element in the fuel circuit, thus re-establishing the correct injector spray pattern.

WHEN SHOULD IT BE USED?FOR:

- Cleaning injectors and re-establishing the injection spray cone
- Eliminating bacteria coming from biofuel
- Cleaning resins commonly found in diesel, from the tank to the fuel chamber
- Re-establishing a correct air/fuel mix, thus reducing consumption
- Efficiently reducing the CO and NOx exhaust gases that are controlled in the Vehicle Inspection Test
- Preventing fuel from freezing
- Lubricating all the elements inside the fuel circuit.

INSTRUCTIONS FOR USE

1. Remove the fuel tank cap
 2. Empty the contents of the container into the tank with a low amount of fuel
 3. Replace the cap of the tank
 4. Start the engine and leave it idle for 5-8 minutes
 5. Drive for about 20 Km or more, keeping the revolutions at a normal level.
 6. Suitable for applying with injector cleaning machines
- Must be performed by a professional expert

WARNING REGARDING USE

To prevent fuel from freezing applying in the following proportion: 900ml – up to 700 litres of fuel.

COMPATIBLE

- 501 Particle Filter Cleaner
- 479 Catalytic Converter Cleaner
- 444 Intake Cleaner
- 427 DT1000 Injector & Glow Plugs Unblocker
- 428 Starting Fluid

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:


Clean and service the whole fuel circuit:

- 1 year

Add the product as a preventive measure:

- 2000 hours
- If the car is parked outside in winter, add a whole bottle to prevent the fuel from freezing

Intake Cleaner

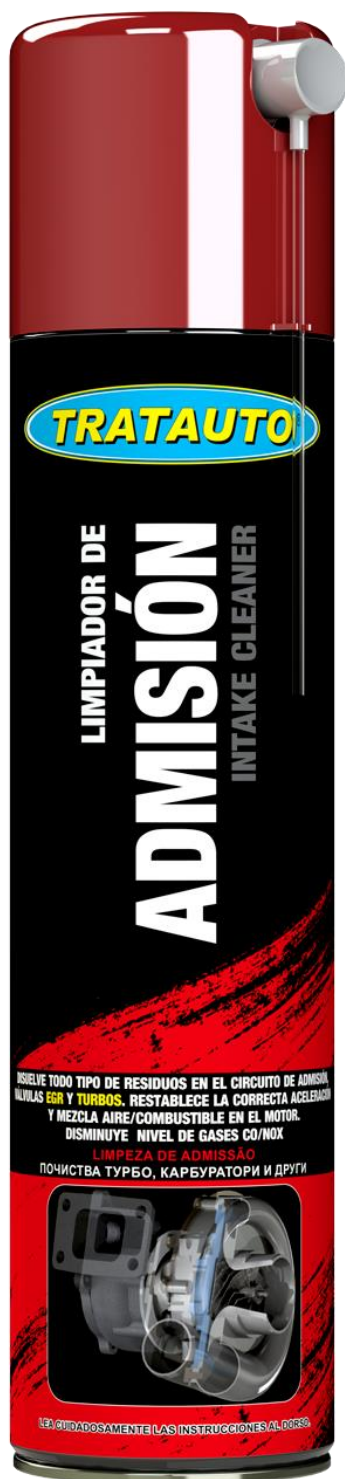

Reference:
843654897444

Capacity:
300 ml.

Units in Box:
15

DESCRIPTION

Aerosol formulated for eliminating residue and sediment from inside the admission system.

WHAT DOES IT DO?

Its powerful action eliminates and cleans remains of varnish, oil, carbon dust and grease in: Carburettor and injection engines - Diesel or petrol engines

WHEN SHOULD IT BE USED?

FOR:

- Cleaning residue and sediment in admission collectors, butterfly valves, turbocompressors, oxygen sensors...
- Re-establishing the correct engine acceleration and idling patterns
- Using in either assembled or dismantled parts, such as EGR valves and lambda probes covered in carbon or oil
- Cleaning the crankcase ventilation elements.

INSTRUCTIONS FOR USE

1. Dismantle all the conducts and elements until you reach to the admission collector/butterfly valve
2. Start the engine and let it run until it reaches operational temperature
3. Maintain the engine at a constant rate of 1,5000 r.p.m.
4. Spray for 3 seconds keeping a distance of between 20 and 30 cm and check that the engine does not accelerate in an uncontrolled way or produce noise caused by pre-ignition (turbo engines)
5. After checking the engine is behaving normally, start spraying for 5 to 10 seconds and alternate each time you spray with 3 accelerations. Keep a check on the engine response
6. After the process has finished, leave the engine switched on for 5-8 to balance the values of the blend
7. Switch off the engine and assemble the necessary elements.

WARNING REGARDING USE

Injection or carburettor petrol engines: apply the product directly after reaching operational temperature

Diesel engines: if necessary, disconnect the EGR valve.

COMPATIBLE

500 Particle Filter Cleaner, 027 Catalytic Converter Cleaner, 461 Diesel Jet Clean 485 Injector Cleaner, 467 ITV Diesel, 468 ITV Petrol, 427 DT1000 Injector & Glow Plugs Unblocker, 428 Starting Fluid

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:


Clean and service the whole admission/exhaust circuit:

- 2 years - 30,000 Km

Add the product as a preventive measure:

- 1 year - 15,000 Km

DT1000 Injector & Glow Plugs Unblocker

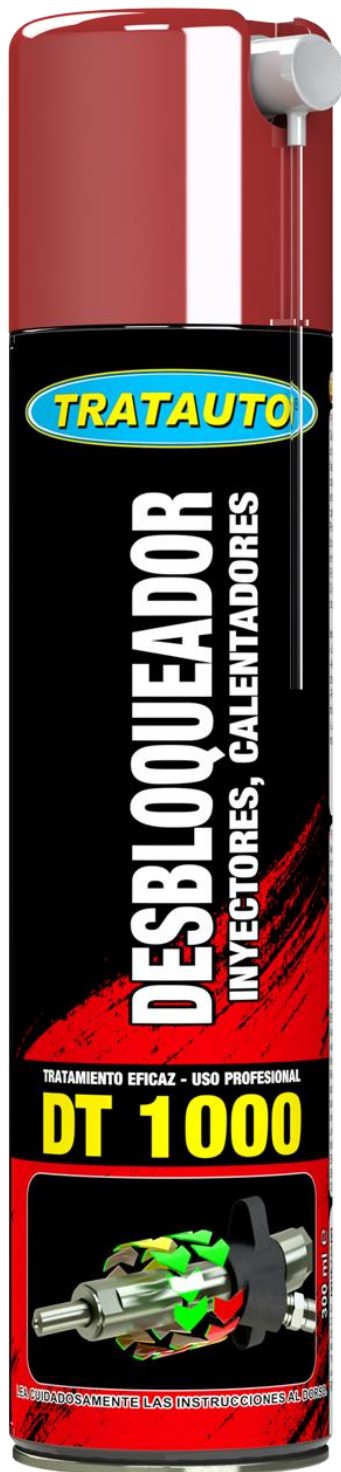

DESCRIPTION

Aerosol formulated for unblocking injectors, heaters, sparking plugs and bolts submitted to extreme pressure and temperatures.

WHAT DOES IT DO?

Its proven action as a tool eliminates and cleans residues of fuel and oil, unblocking:

- Injectors in petrol and diesel engines
- Sparking plugs and heaters
- Bolts and screws in turbos, EGR valves, cylinder heads...

WHEN SHOULD IT BE USED?

- It is especially suitable for:
- Extracting injectors and heaters more easily
- Cleaning and eliminating extremely carbonised residues
- Un blocking EGR valves, turbo elements, bearings...

INSTRUCTIONS FOR USE

1. Apply generously to the parts that are going to be dismantled
2. Leave the product to act for at least 20 minutes
3. Clean the residues and repeat the application if necessary.

WARNING REGARDING USE

Prevents residues from entering inside the engine
Apply to elements at room temperature

COMPATIBILITIES

- 500 Particle Filter Cleaner
- 027 Catalytic Converter Cleaner
- 461 Diesel Jet Clean
- 485 Injector Cleaner
- 467 ITV Diesel
- 468 ITV Petrol
- 444 Intake Cleaner
- 428 Starting Fluid

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean and service the whole fuel circuit:

- 2 years - 30,000 Km

Add the product as a preventive measure:


- Not Present

Reference:
843654897427

Capacity:
300 ml.

Units in Box:
15

Tarting Fluid

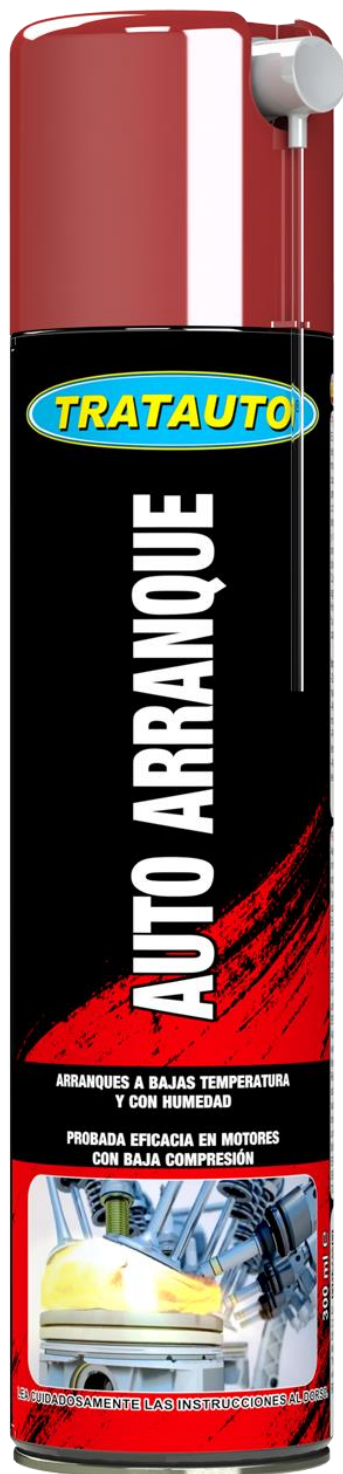

Reference:
843654897428

Capacity:
300 ml.

Units in Box:
15

DESCRIPTION

An especially formulated Aerosol to obtain maximum efficiency in starting up of any type of engine at low temperatures or with low compression.

WHAT DOES IT DO?

Optimum level of ignition and lubrication which offers an efficient and safe start-up of:

- Carburettor or injection engines
- Petrol or diesel engines
- 2 or 4 stroke engines.

WHEN SHOULD IT BE USED?

- Especially suitable for:
- Starting up engines in adverse conditions caused by low temperatures or humidity.
- Starting up engines with a low compression ratio. Professional (garage): a tool for starting engines with start-up faults.
- Engines that are not used for long periods of time.

INSTRUCTIONS FOR USE

1. Dismantle all the conducts and elements until you reach to the admission collector/butterfly valve.
2. Spray for a maximum of 3-5 seconds.
3. Start the engine and let it run until it reaches operational temperature.
4. Switch off the engine and reassemble the necessary elements.

WARNING REGARDING USE

Diesel engines: the heaters must be switched off to prevent the pre-ignition of the product.

Check the engine works (if it does not start after repeating the steps 4 or 5 times).

COMPATIBILITIES

- 500 Particle Filter Cleaner
- 027 Catalytic Converter Cleaner
- 461 Diesel Jet Clean
- 485 Injector Cleaner
- 467 ITV Diesel
- 468 ITV Petrol
- 444 Intake Cleaner
- 427 DT1000 Injector & Glow Plugs Unblocker

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:


Clean and service the whole fuel circuit:

- 2 years - 30,000 Km

Add the product as a preventive measure:

- Not Present

All in 1 – Super Multi Use

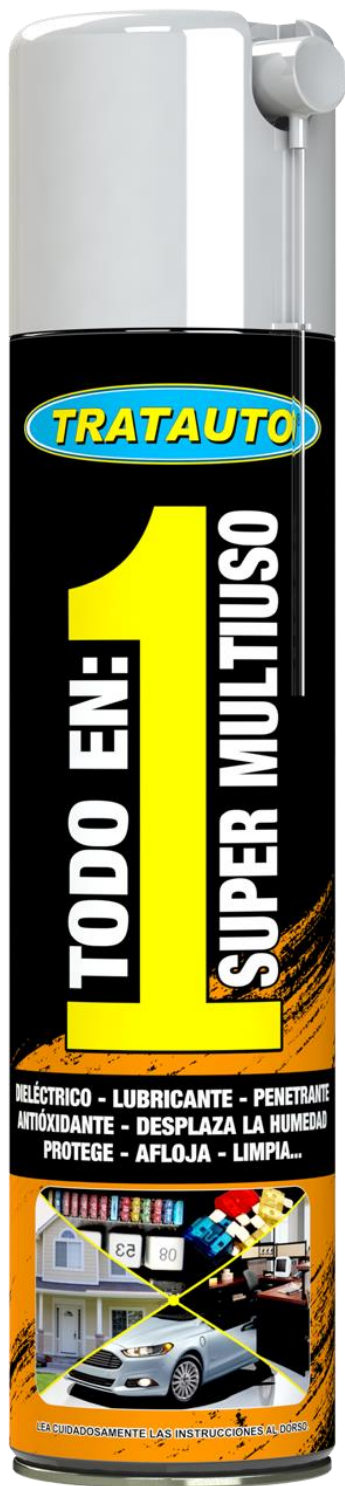

DESCRIPTION

Cutting edge, multi-use product with new, improved formula.
Can be sprayed onto any angle, evaporating quickly without leaving a mark.

WHAT DOES IT DO?

Loosens, cleans, lubricates and protects electrical contacts, removing humidity in any surface or applied part.

WHEN SHOULD IT BE USED?

FOR:

- Efficiently lubricating all types of movable parts (hinges, chains, gears...)
- Protecting against rust against all types of: tools, sports accessories, radio control, batteries...
- Unblocking bolts, screws, nuts, locks, valves, exhaust systems, suspensions...
- Removes humidity from any surface on which it is applied; ideal as a dielectric
- Removes residues of adhesives, rust and tar
- Cleans and maintains tools, electrical and electronic equipment, fuse boxes, diagnosis, alternators, starting motors...

INSTRUCTIONS FOR USE

1. Shake container before use
2. Spray onto the surface and leave to act

WARNING REGARDING USE

During the treatment it is normal if the following are noticed:

- Characteristic smells
- Leaves a stain

COMPATIBLE

409 White Lithium Grease

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Use in connectors, in each diagnosis carried out in the garage, dismantlement and repair of electronic systems

Preventive:


- In parts and pieces that require special insulation from humidity

Reference:
843654897422

Capacity:
600 ml.

Units in Box:
12

Contact & Electrical Cleaner

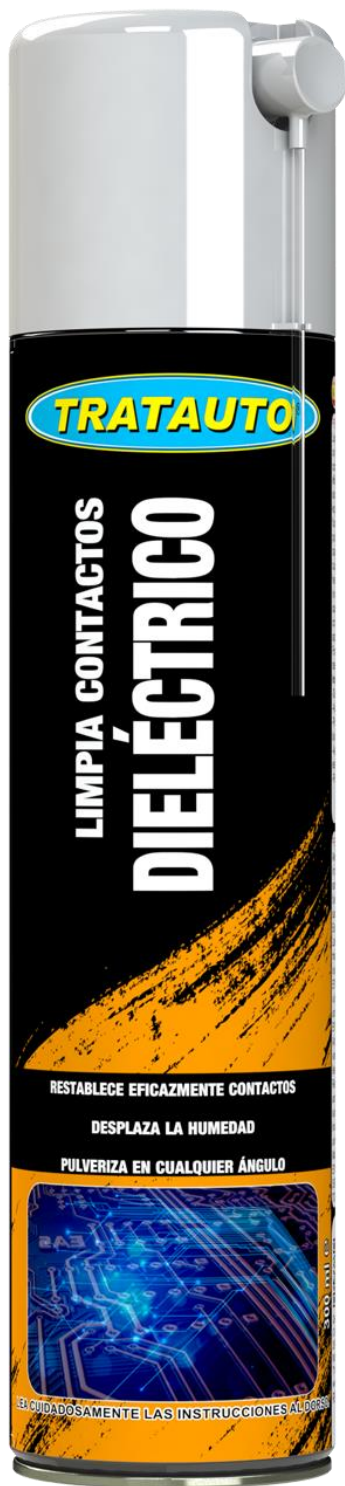

DESCRIPTION

A dielectric contact aerosol cleaner with special features. Universal use.
A basic tools for garages, industry, nautical...

WHAT DOES IT DO?

A formula with proven efficiency for cleaning, degreasing and protecting all types of electrical or electronic elements.

WHEN SHOULD IT BE USED?

FOR:

- Cleaning and eliminating residues in fuse boxes, diagnosis, alternators, starting motors, coils, connectors, fuses and any other type of electrical or electronic equipment.
- Removing humidity from any type of surface on which it is applied. Special features as a dielectric. Can be used with voltages of ≤ 30 Kv.
- Re-establishing the optimum contact and protecting against humidity in equipment that is subject to extreme operational conditions.
- Repairing or checking electrical and electronic parts which require a contact cleaner that evaporates quickly without leaving residues.
- Cleaning and servicing tools, electrical and electronic equipment, fuse boxes, diagnosis, alternators, starting motors...

INSTRUCTIONS FOR USE

1. Disconnect the electrical systems before applying.
2. Shake the container and generously spray over the parts to be treated until the humidity has been dried or the dirt has disappeared.
3. Leave to dry and connect the electrical part again.
4. Can be sprayed in any position; it is not a conductor; does not leave residues.

WARNING REGARDING USE

During the treatment it is normal if the following are noticed:

- Characteristic smells
- Leaves a stain

COMPATIBLE

All in 1 – Super MultiUse

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Use in connectors, in each diagnosis carried out in the garage, dismantlement and repair of electronic systems.

Preventive:


- In parts and pieces that require special insulation from humidity in garages, homes, industry, nautical and building work.

Reference:
843654897423

Capacity:
300 ml.

Units in Box:
15

Brake Cleaner

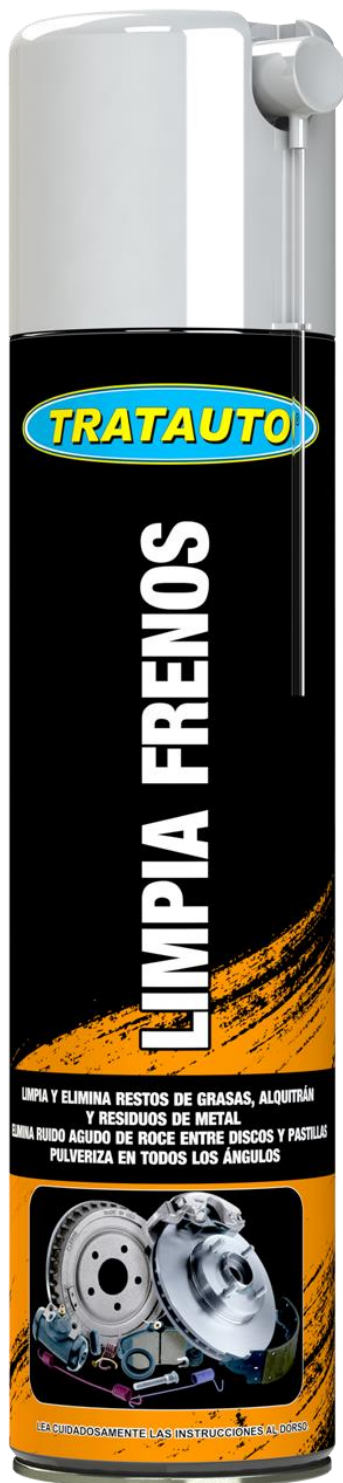

DESCRIPTION

New formula for cleaning and removing dirt from clutch and braking systems.

WHAT DOES IT DO?

Cleans and eliminates remains of oil, grease, brake fluid and dirt from any surface.

WHEN SHOULD IT BE USED?

FOR:

- Cleaning brake discs, drums, pads, callipers and clutch elements
- Cleaning and degreasing metal, ceramic and glass
- Eliminating screeches caused by rubbing against: discs-pads, brake drums-shoes
- Cleaning hubs and rims
- Extensive power of action; sprays in any position; evaporates quickly without leaving any type of residue.

INSTRUCTIONS FOR USE

1. Shake the container before use
 2. Spray generously over the surface to be cleaned
 3. Eliminate the excess with paper or just leave it to evaporate
 4. Repeat the process if necessary.
- Must be performed by a professional expert
 - Require dismantlement

WARNING REGARDING USE

Important: Check braking level before returning the vehicle
NOT abrasive; does not affect rubber parts and hoses

COMPATIBLE

- 409 White Lithium Grease
- 426 Engine Degreaser

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean or service the components after:

- 2 years - 30,000 Km

Preventive: in parts and pieces that require special insulation from humidity

- 1 year - 15,000 Km

Reference:
843654897425

Capacity:
600 ml.

Units in Box:
12

Engine Degreaser



DESCRIPTION

Aerosol with a cutting-edge formula, for cleaning the engine exteriors and other parts of the car.

WHAT DOES IT DO?

Cleans oil and grease on metallic, plastic and other surfaces.

Can be sprayed in any position, thus making it easier to reach difficult areas

WHEN SHOULD IT BE USED?

FOR:

- Dissolving and cleaning all types of oil and grease
- Eliminating remains and sediment from engines, gearboxes and other components
- Lubricating and protecting
- Localising oil leaks

INSTRUCTIONS FOR USE

1. Shake container before use
2. Spray over the surface to be cleaned
3. Eliminate the water remains

WARNING REGARDING USE

Apply over surfaces at room temperature

Do not use on painted surfaces

COMPATIBLE

444 Intake Cleaner

425 Brake Cleaner

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean or service the components after:

- 2 years - 30,000 Km

Add the product as a preventive measure:

- 1 year - 15,000 Km

Reference:
843654897426

Capacity:
300 ml.

Units in Box:
15

Car Interior Cleaner



DESCRIPTION

Active foam aerosol for cleaning all types of upholstery.

WHAT DOES IT DO?

It dissolves dirt and eliminates stains on natural and synthetic fabrics.

WHEN SHOULD IT BE USED?

FOR:

- Cleaning and eliminating smells in: cars, caravans, boats, homes, offices, waiting rooms...
- Cleaning and eliminating smells caused by drinks, cigarettes, food, pets...

INSTRUCTIONS FOR USE

1. Shake container before use
2. Spry over surface or fabric
3. Leave the foam to act until it has disappeared
4. Rub with a damp cloth
5. On difficult stains, use the brush supplied with the product.

WARNING REGARDING USE

The brush included helps remove residues after drying

To prevent stains, apply over the whole surface

Natural and synthetic leather: do not use the brush supplied.

COMPATIBLE

418 Super Care – Clean & Shine

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean or service the surfaces after:


- 6 months
- Use periodically on natural and synthetic surfaces to protect and lengthen their useful life

Reference:
843654897002

Capacity:
400 ml.

Units in Box:
12

Dashboard Cleaner

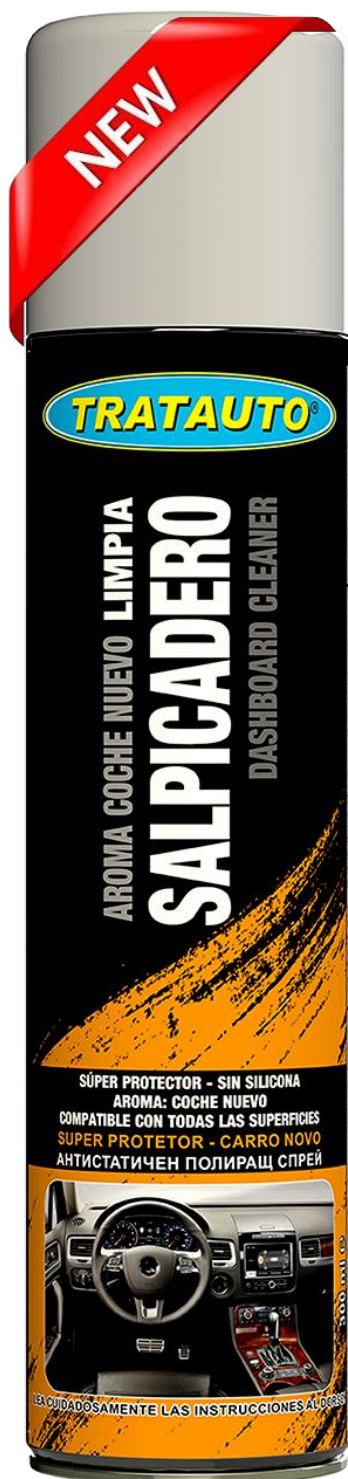

DESCRIPTION

Special formula without silicone with new car aroma.

WHAT DOES IT DO?

Clean the plastic parts.

Excellent cleaning and protection properties in each application.

Suitable for all interior plastics of vehicles.

Renew and revive all interior plastics.

Leaves a pleasant new car aroma.

Without silicone.

INSTRUCTIONS FOR USE

1. Apply to the dashboard at a distance of approx. 20 cm.
2. Leave for a few moments.
3. Clean the treated surface with a soft cloth.

WARNINGS OF USE

We recommend applying the product in any workshop or product site without SILICONE.

COMPATIBILITIES

163 "PUR-ODOR"- Odor Eliminator & Air Purifier

362 Super Air Fresheners

002 Car Interior Cleaner

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:


Use periodically on surfaces to protect and lengthen its life.

Reference:
843654897418

Capacity:
300 ml.

Units in Box:
15

Rain Repellent

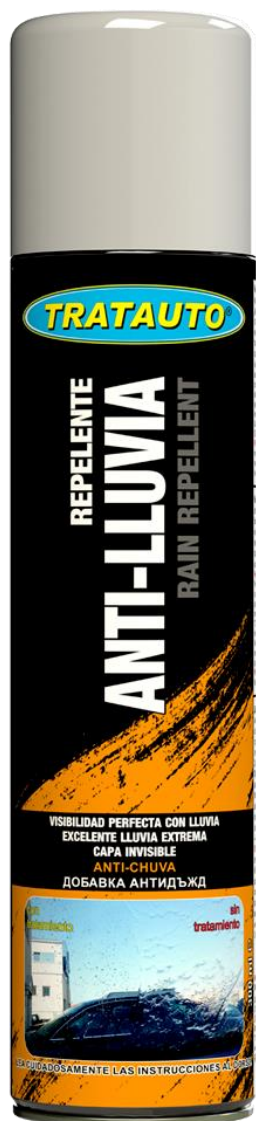

DESCRIPTION

Special formula creates an invisible layer to repel drops of water on the glass.

WHAT DOES IT DO?

Creates a nonstick layer and slides over raindrops and slides easily.

WHEN SHOULD IT BE USED? FOR:

In case of rain, snow and hail. (Rain repellent).

So that the visibility with rain is very superior.

We recommend to use with heavy rain.

From the 80 km / h excellent results.

HOW TO USE

1. Apply the product and let it act for 2 minutes.
2. Clean the treated surface.
3. Apply on windshields, side windows, mirrors and headlights.

Warnings of Use

We recommend using ANTI-RAIN in case of heavy rain, snow ...

COMPATIBILITIES

411 Liquid Tire Chain

418 Dashboard Cleaner

419 Anti Fog

420 Windshield De-Icer

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Clean the glass very well

Use in case of heavy rain, snow ...

Can last up to 6 months

Reference:
843654897421

Capacity:
90 ml.

Units in Box:
24

Windshield De-Icer



DESCRIPTION

Specially formulated to defrost the ice.

WHAT DOES IT DO?

Formula to defrost and remove frost or frost formed on windshields, windows, headlights and vehicle locks.

It slows the formation of ice and frost.

It does not damage the surfaces of the vehicle.

HOW TO USE

1. Apply on the windshield with the container upright.
2. Leave for a few moments.
3. Operate the windshield.

WARNINGS OF USE

We recommend applying for a good use of windscreens and crystals.

COMPATIBILITIES

411 Liquid Tire Chain

421 Rain Repellent

419 Anti Fog

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Apply to thaw and protect windshields and glass.

Reference:
843654897420

Capacity:
300 ml.

Units in Box:
15

Anti-Fog



DESCRIPTION

Product specially formulated to avoid fog in the interior: Car windshields, visor of helmets ...

WHEN SHOULD IT BE USED? FOR:

- With cold and rain it is usual for the car's windows to fog.
- Useful in all cases in conditions of differences of exterior-interior temperature, which is the case to form the fog: Crystals, Moons visors of motorcycle helmets, glasses ..
- The perfect solution in cases of damaged heater in the vehicle.

INSTRUCTIONS FOR USE

1. Clean the surface and leave to dry.
2. Apply anti-fog on a clean cloth and treat the surface.

WARNINGS OF USE

It is recommended before using the product - clean and dry surfaces. Improves visibility in all directions.

COMPATIBILITIES

418 Dashboard Cleaner
420 Windshield De-Icer
421 Rain-Repellent

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:


For good maintenance, apply every time the glass fogs too much, to create a completely clear vision.

Reference:
843654897419

Capacity:
300 ml.

Units in Box:
15

Liquid Tire Chain

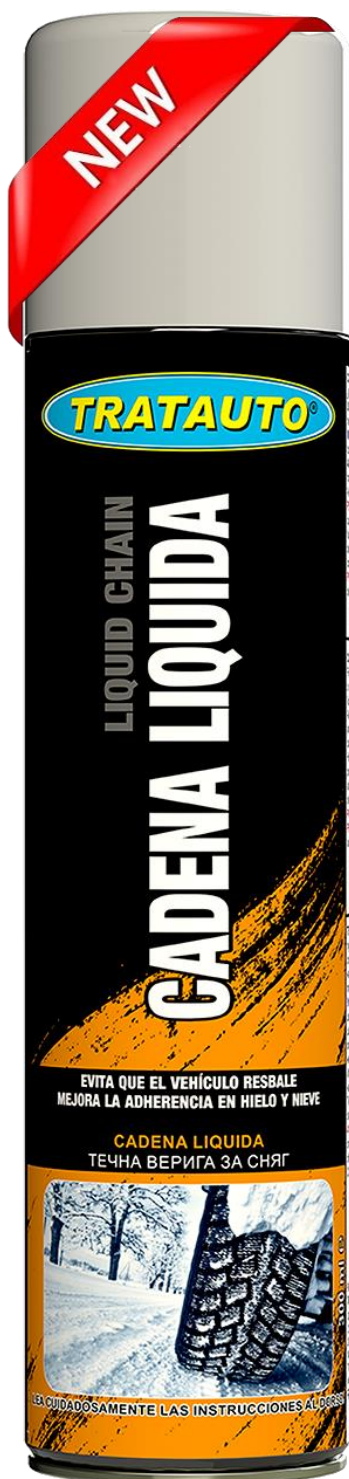

DESCRIPTION

Formula to improve adhesion in ice and snow.

WHAT DOES IT DO?

Formulated by special resins to improve adhesion.

WHEN SHOULD IT BE USED? FOR:

- Prevent the vehicle from slipping.
- Upon contact with the moisture, they adhere to the tire and the road.
- Excellent liquid chain in adverse weather conditions.

INSTRUCTIONS FOR USE

1. Shake before using.
2. Apply evenly the LIQUID CHAIN over the entire surface of the drive wheels.
3. Leave to act before restarting.

WARNINGS OF USE

We recommend as a substitute for chains and especially for short distances.

COMPATIBILITIES

- 421 Rain Repellent
- 418 Dashboard Cleaner
- 419 Anti Fog
- 420 Windshield De-Icer

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Apply as a substitute for strings.

Reference:
843654897411

Capacity:
300 ml.

Units in Box:
15

Super Air Fresheners



DESCRIPTION

Extra-concentrated aerosol air freshener with high pressure dispenser. Range of fragrances: Blueberry, Lemon, Apple, Oxygen, Vanilla.

WHAT DOES IT DO?

It renews charged atmospheres with a touch of fragrance. It neutralises undesired smells.

WHEN SHOULD IT BE USED?

FOR:

- Efficiently neutralising bad smells
- Creating distinguished atmospheres
- Creating clean atmospheres
- Creating fruity atmospheres
- Use in: cars, caravans, boats, homes, offices, changing rooms, waiting rooms...
- Large surfaces, thanks to its great dispensing capacity.

INSTRUCTIONS FOR USE

1. Shake the container before use
2. Spray upwards for a few seconds in the area to be treated.

WARNING REGARDING USE

Do not apply on polished surfaces

Do not apply on fabrics at a distance of less than 1 metre

After using the product, we recommend the room is kept unoccupied for a short period of time.

COMPATIBLE

002 Car Interior Cleaner

418 Super Care – Clean & Shine

163 “PUR-ODOR”- Odor Eliminator & Air Purifier

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

- Its continuous use will keep a pleasant atmosphere in the different areas where it is applied

Reference:

LEMON: 843654897363

OCEAN: 843654897365

VANILLA: 843654897366

Capacity:
600 ml.

Units in Box:
12

Reference:


BLUEBERRY: 843654897370

APPLE: 843654897371

Capacity:
300 ml.

Units in Box:
15



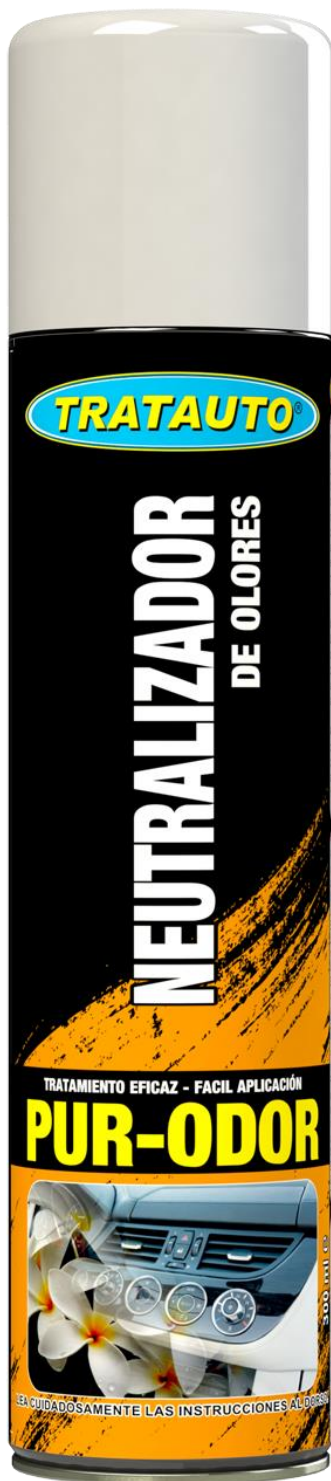

Reference:
843654897163

Capacity:
300 ml.

Units in Box:
15

DESCRIPTION

Effective formula in aerosol for neutralising the origin of all kinds of smells.

WHAT DOES IT DO?

It provides optimum results in all atmospheres and fabrics that have smells that need to be eliminated.

WHEN SHOULD IT BE USED?

- Especially suitable for:
- Eliminating and neutralising the origin of smells
- Creating a clean atmosphere in: cars, homes, offices, changing rooms, waiting rooms, caravans, boats...
- Eliminating smells in fabrics, sports accessories...
- Neutralising smells caused by: pets, smoking, dampness...

INSTRUCTIONS FOR USE

1. Always shake the container before applying the product
2. **Domestic use:**
 - 1) Close the space where it is going to be used.
 - 2) Hold the container in a vertical position.
 - 3) Spray for several seconds in an upwards direction.
 - 4) Leave to act for at least 10 minutes
3. **Applying on fabrics:**
 - 1) Carry out a test on a non-visible area of the fabric.
 - 2) Spray directly at about 60 cm in a continuous and even manner.

WARNING REGARDING USE

Do not spray directly onto people and pets

For persistent smells: apply and keep the area closed for over 2 hours

After applying the product, it is recommendable to keep the treated space unoccupied for a short period of time.

COMPATIBLE

418 Super Care – Clean & Shine

Gama Super Air Fresheners

002 Car Interior Cleaner

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Our Technical Department recommends using the product frequently. This way, you will always have a pleasant atmosphere in the different areas in which the product is applied

Its frequent use will keep a pleasant atmosphere in the different areas in which it is applied

R-134^a A/C Stop Leak

DESCRIPTION

Formulated for sealing micro leaks throughout the whole air conditioning system Includes UV leak detector. Does not contain polymer-based components; therefore it does not crystallise or obstruct elements in the system. Can be safely used in gas recovery machines; it can be recovered without the risk of obstructions.

WHAT DOES IT DO?

It forms a thin layer all over the system, sealing small leaks or pores, without varying the convection or heat exchange.

Lubricates and vitalises all the components in the system.

WHEN SHOULD IT BE USED? - FOR:

- Permanently sealing micro leaks situated in evaporators, condensers, hoses and rubber joints
- Revitalising joints and other components of the system
- Detecting leaks

INSTRUCTIONS FOR USE

1. Recycle the cooling gas
2. Empty the circuit
3. Screw the hose onto the container, making sure the tip of the valve does not prematurely perforate the seal
4. Purge the hose with the contents of the products before attaching it to the circuit
5. Quickly attach the corresponding connector to the lower valve (L) of the circuit
6. Turn the key clockwise to perforate the seal of the container and then turn in the opposite direction to empty the contents.
7. Hold the container upside down and shake.
8. When the container has emptied, disconnect the hose in this order: 1) from the circuit inlet (L) and 2) from the container
9. Load the cooling gas according to the values given by the manufacturer, subtracting the net weight of the contents of the product
10. Start the engine and switch on the air conditioning system to maximum for 20 minutes
11. Vehicles loaded from above: Follow the previous steps with the engine switched on using the high adaptor (H).
12. Must be performed by a professional expert

WARNING REGARDING USE

In exceptional cases, the product can be added after the load, with the engine running and never from above

DO NOT ATTACH THE HOSE TO THE HIGH PRESSURE INLET WITH THE ENGINE SWITCHED ON.

Range of concentration: It can treat systems with a load of up to 1200 gr, with one or two evaporators

The hose cannot be used again

COMPATIBLE

Compatible with mineral type oils / Ester / PAG. Only for R-134^a

RECOMMENDATIONS AND MAINTENANCE

Correct maintenance prevents expensive repairs. For this reason our Technical Department recommends:

Service the whole air conditioning system:

- 2 years - 30,000 Km

Add the product as a preventive measure:

- 1 year - 15,000 Km



Reference:
843654897164

Capacity:
113 gr.

Units in Box:
12

Air Conditioner Treatment

DESCRIPTION

Spray foam formulated to eliminate bad smells from air conditioning ventilation ducts

Includes application nozzle

WHAT DOES IT DO?

Eliminates and cleans the origin of bad smells in any ventilation system

WHEN SHOULD IT BE USED?

FOR:

- Eliminating bad smells produced by the adherence of mould on ventilation ducts
- Use in ventilation systems in cars, caravans, motor caravans, refrigerated trucks, boats, homes, offices...
- Cars parked for a long period of time

INSTRUCTIONS FOR USE

1. Keep doors and windows open throughout the whole treatment process
2. Remove the filter from the inside the compartment
3. Close the compartment ventilation outlets
4. Shake the container and attach the nozzle
5. Insert the nozzle completely into the exterior air intake vents of the compartment or evaporator box
6. Press the valve and slowly remove the nozzle, whilst spraying the foam
7. Switch on the engine
8. Turn on the heating and let it run for 30 minutes set at maximum temperature and speed with recirculation
9. Use a cloth or absorbent paper to clean possible foam residues.

WARNING REGARDING USE

During the treatment it is normal if the following are noticed:

- Characteristic smells
- Leaves a stain

COMPATIBLE

418 Super Care – Clean & Shine

Gama Super Air Fresheners

002 Car Interior Cleaner

163 "PUR-ODOR"- Odor Eliminator & Air Purifier

RECOMMENDATIONS AND MAINTENANCE


Correct maintenance prevents expensive repairs. For this reason our **Technical Department** recommends:

Service the whole air conditioning system:

- 2 years - 30,000 Km

Add the product as a preventive measure:

- 1 year - 15,000 Km
- When to change the cabin filter

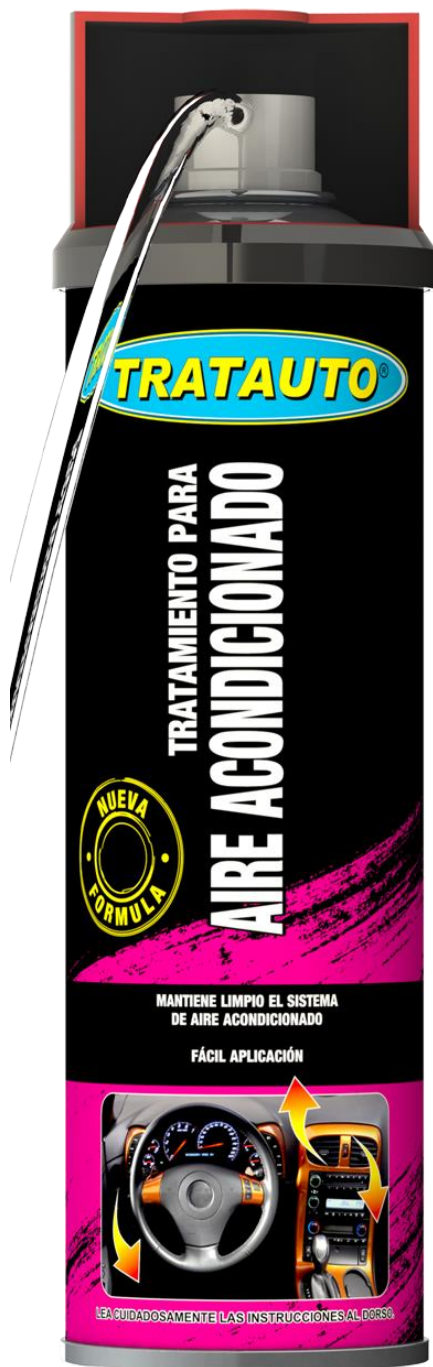

Reference:
843654897126

Capacity:
500 ml.

Units in Box:
12


Para mais informações entre em contato com o nosso revendedor mais próximo

FIMAG-IMPORTAÇÃO:

Rua Carlos Magalhaes, 7 - Quinta de Cabanas, Dume-Braga, 4701-905

Teléfono: +351 253 607 470

E-MAIL: geral@fimag.pt

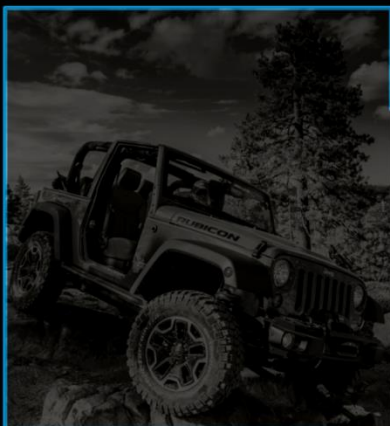

LINHAS DE PRODUTOS:

AUTOMOCIÓN

4X4

FROTA



MOTOCICLETAS

INDÚSTRIA

NÁUTICO

AGRÍCOLA

CONSTRUÇÃO

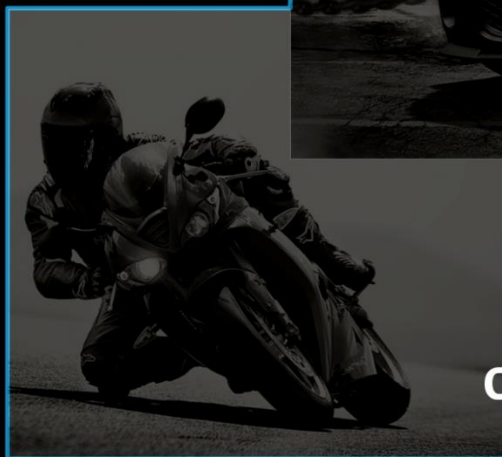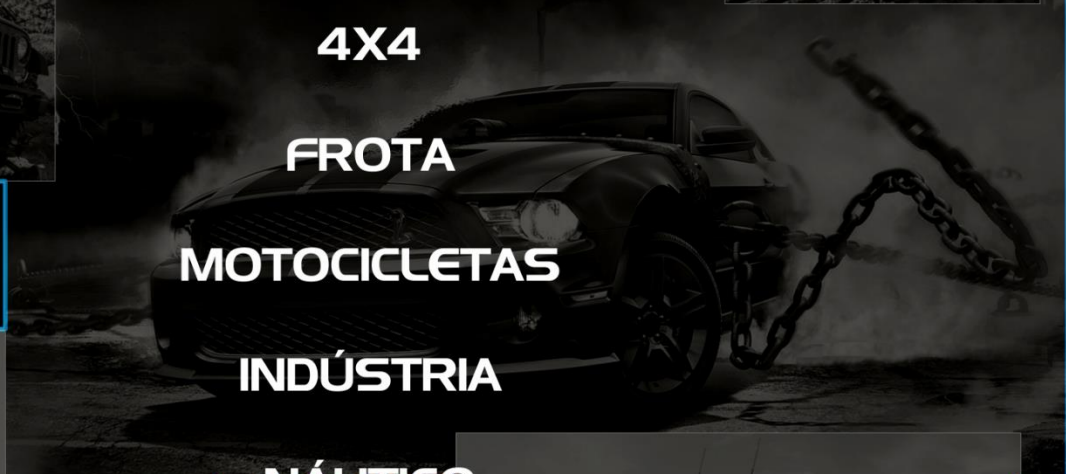

DISTRIBUIDOR AUTORIZADO:

